

LOW TORQUE AC-TYPE SEMI-AUTOMATIC TRIGGER START CLUTCH TYPE SERIES




SK-2 Series [SK-205LS, SK-215LS, SK-2205LS, SK-2215LS]




- AC plug; no adaptor needed.
- Inner dual insulator which is conforming to the international safety standard. 100% safe, light and handy, easy to use and appearance fits in with ergonomics logic.
- Precise torque. It is adjustable from small to large but speed stays constant. The rotation speed is fast and also light and handy. Boost productively.
- Best choice for general electronic appliances, such as lamps, small home appliances, toys and etc.

External Dimension

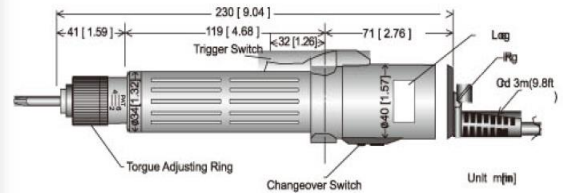

Torque Range Chart

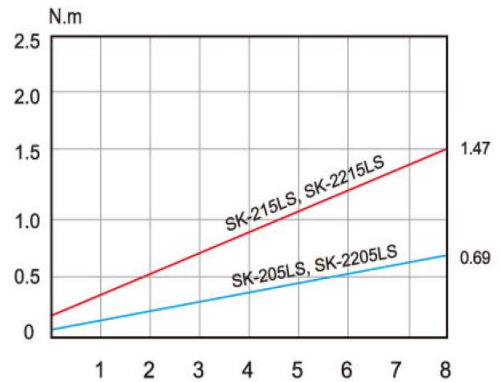

Specifications

Model	SK-205LS	SK-215LS	SK-2205LS	SK-2215LS	
Input Voltage	AC110~120V 50/60Hz		AC220~240V 50/60Hz		
Torque	(kgf.cm)	0.5~7	2~15	0.5~7	2~15
	(Lbf.in)	0.44~6.10	1.77~13	0.44~6.10	1.77~13
	(N.m)	0.05~0.69	0.2~1.47	0.05~0.69	0.2~1.47
Repeatable Torque Accuracy(%)	±5%				
Torque Adjustment	Stepless				
Free Speed(r.p.m)	1100	1100	1000	1000	
Power Consumption	0.3A	0.3A	0.2A	0.2A	
Screw Size Dia (mm)	Machine Screw	1.6~3.0	2.0~4.0	1.6~3.0	2.0~4.0
	Tapping Screw	1.4~2.0	2.0~3.0	1.4~2.0	2.0~3.0
Weight(g)	480				
Length(mm)	230				
ESD(Anti-Static)	—				
UL(CUL)	—				
CE	—				
RoHS	✓				
Bit Type					

Accessories

