





- Torque range is from 5-45kgf.cm., Torque accuracy $\pm 5\%$
- Easy to operate and able to improve production efficiency
- Suitable when assembling for the out shell screws of general home electric appliances.
- The best choice when composing the tapping screws under 5mm diameter.

External Dimension

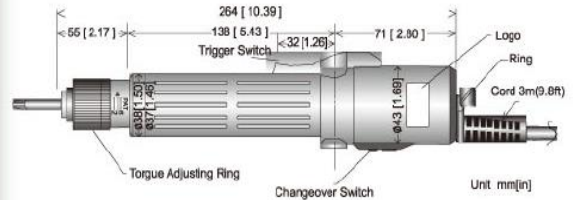

Torque Range Chart

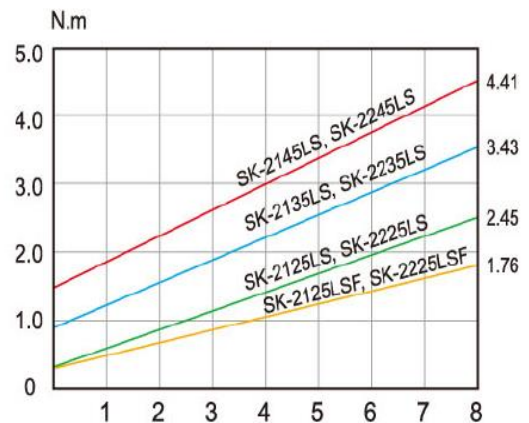

Specifications

Model		SK-2125LS	SK-2135LS	SK-2145LS	SK-2125LSF	SK-2225LS	SK-2235LS	SK-2245LS	SK-2225LSF
Input Voltage		AC110~120V 50/60Hz				AC220~240V 50/60Hz			
Torque	(kgf.cm)	5~25	10~35	15~45	5~18	5~25	10~35	15~45	5~18
	(Lbf.in)	4.34~21.68	8.67~30.35	13~39.02	4.34~15.58	4.34~21.68	8.67~30.35	13~39.02	4.34~15.58
	(N.m)	0.49~2.45	0.98~3.43	1.47~4.41	0.49~1.76	0.49~2.45	0.98~3.43	1.47~4.41	0.49~1.76
Repeatable Torque Accuracy(%)		$\pm 5\%$							
Torque Adjustment		Stepless							
Free Speed(r.p.m)		1000	830	550	2000	1000	700	500	2000
Power Consumption		0.3A	0.3A	0.3A	0.3A	0.2A	0.2A	0.2A	0.2A
Screw Size Dia (mm)	Machine Screw	2.6~5.0	2.6~5.0	3.0~6.0	2.0~4.0	2.6~5.0	2.6~5.0	3.0~6.0	2.0~4.0
	Tapping Screw	2.6~3.5	2.6~4.0	3.0~5.0	2.0~3.5	2.6~3.5	2.6~4.0	3.0~5.0	2.0~3.5
Weight(g)		600							
Length(mm)		264							
ESD(Anti-Static)		-							
UL(CUL)		-							
CE		-							
RoHS		✓							
Bit Type									

Accessories

