





### External Dimension

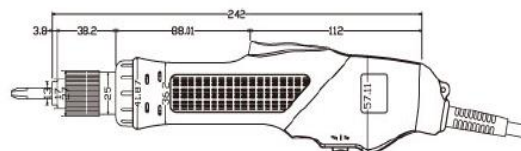


SK-3120L

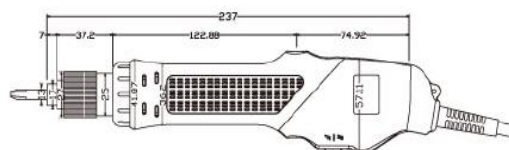

SK-3120P

### Torque Range Chart

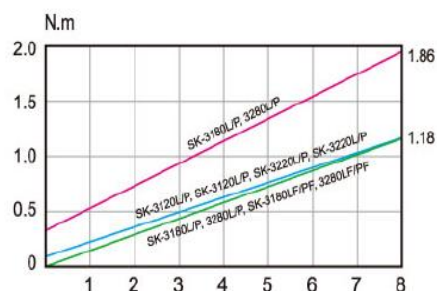

- Extra strong magnet.
- Fatigue-resistant for long time using, torque accuracy  $\pm 3\%$
- Compact, light-weight, and easy to operate, improve production efficiency.
- Best fit for laptop and peripherals operation.
- Torque fixable with a fixing ring (KC-6C)  
※ Conform to EMI, EMC International Safety Standards.

### Specifications

Model		SK-3120L SK-3120P	SK-3180L SK-3180P	SK-3180LF SK-3180PF	SK-3220L SK-3220P	SK-3280L SK-3280P	SK-3280LF SK-3280PF
Input Voltage		AC110~120V 50/60Hz			AC220~240V 50/60Hz		
Torque	(kgf.cm)	L: 1.5~12 P: 2~12	L/P: 3~19	L: 1.5~12 P: 2~12	L: 1.5~12 P: 2~12	L/P: 3~19	L: 1.5~12 P: 2~12
	(Lbf.in)	L: 1.33~10.44 P: 1.77~10.44	L/P: 2.57~16.45	L: 1.33~10.44 P: 1.77~10.44	L: 1.33~10.44 P: 1.77~10.44	L/P: 2.57~16.46	L: 1.33~10.44 P: 1.77~10.44
	(N.m)	L: 0.15~1.18 P: 0.2~11.8	L/P: 0.29~1.86	L: 0.15~1.18 P: 0.2~11.8	L: 0.15~1.18 P: 0.2~11.8	L/P: 0.29~1.86	L: 0.15~1.18 P: 0.2~11.8
Repeatable Torque Accuracy(%)		±3%					
Torque Adjustment		Stepless					
Free Speed(r.p.m)		1000	1000	2000	1000	1000	2000
Power Consumption		0.3A	0.3A	0.3A	0.2A	0.2A	0.2A
Screw Size Dia (mm)	Machine Screw	1.6~3.0	2.6~3.5	2.0~3.0	1.6~3.0	2.6~3.5	2.0~3.0
	Tapping Screw	1.6~2.6	2.6~3.0	2.0~2.6	1.6~2.6	2.6~3.0	2.0~2.6
Weight(g)		550			550		
Length(mm)		L/242			P/237		
ESD(Anti-Static)		-					
UL(Anti-Static)		-					
CE		-					
RoHS		✓					
Bit Type							

### Accessories

Torque Fixing Ring  
KC-6C



Torque Adjuster  
KW-3



Suspension Rack  
KH-4



Spring Balancer  
KL-1200



90° Degree  
Attachment  
KL-2  
(only "L" type)

