




External Dimension

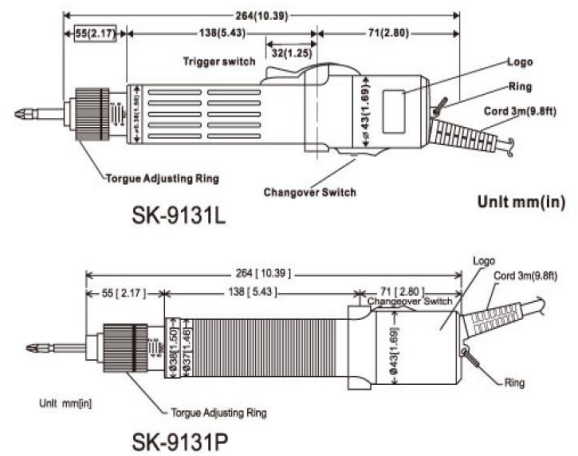


SK-9131L, SK-9231L, SK-9131LF, SK-9231LF

- Small outer dimension, light-weight.
- Mid-range torque 5-20 kgf.cm.
- High rotation speed, torque accuracy $\pm 3\%$.
- Best fit for general machine screws operation.
- Torque adjustable and fixable with a fixing ring (KC-2).
- ※ Conform to EMI, EMC International Safety Standards.

SK-9131P, SK-9231P, SK-9131PF, SK-9231PF

- Small outer dimension, light-weight.
- Mid-range torque 5-20 kgf.cm.
- High rotation speed, torque accuracy $\pm 3\%$.
- Best fit for general machine screws operation.
- Torque adjustable and fixable with a fixing ring (KC-2).
- ※ Conform to EMI, EMC International Safety Standards.

Torque Range Chart

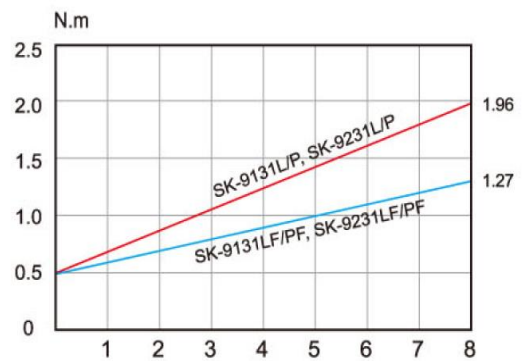

Specifications

| Model | | SK-9131L | SK-9131P | SK-9131LF | SK-9131PF | SK-9231L | SK-9231P | SK-9231LF | SK-9231PF |
|-------------------------------|---------------|--------------------|----------|------------|-----------|--------------------|----------|------------|-----------|
| Input Voltage | | AC110~120V 50/60Hz | | | | AC220~240V 50/60Hz | | | |
| Torque | (kgf.cm) | 5~20 | | 5~13 | | 5~20 | | 5~13 | |
| | (Lbf.in) | 4.34~17.35 | | 4.34~11.24 | | 4.34~17.35 | | 4.34~11.24 | |
| | (N.m) | 0.49~1.96 | | 0.49~1.27 | | 0.49~1.96 | | 0.49~1.27 | |
| Repeatable Torque Accuracy(%) | | $\pm 3\%$ | | | | | | | |
| Torque Adjustment | | Stepless | | | | | | | |
| Free Speed(r.p.m) | | 1000 | | 2000 | | 1000 | | 2000 | |
| Power Consumption | | 0.3A | | 0.3A | | 0.2A | | 0.2A | |
| Screw Size Dia (mm) | Machine Screw | 2.6~4.0 | | 2.0~3.5 | | 2.6~4.0 | | 2.0~3.5 | |
| | Tapping Screw | 2.6~3.5 | | 2.0~3.0 | | 2.6~3.5 | | 2.0~3.0 | |
| Weight(g) | | 620 | | | | | | | |
| Length(mm) | | 264 | | | | | | | |
| ESD(Anti-Static) | | - | | | | | | | |
| UL(CUL) | | - | | | | | | | |
| CE | | - | | | | | | | |
| RoHS | | ✓ | | | | | | | |
| Bit Type | | | | | | | | | |

Accessories

