

KILEWS LOW TORQUE DC-TYPE AUTOMATIC VACUUM SCREWDRIVERS

SKD-2000 (VACUUM TYPE) Series




- Vacuum screwdriver was taking the series of SKD-2000L as reference and being created by adding the vacuum head. The main purpose is sucking the non-magnetic screws, such as plastic screws / aluminum-made screws / stainless steel screws and any other screws that does not contain magnetic.
- Any type and specification of screws can be sucked which only need to replace the head to KS-2.
- The volume of vacuum screwdriver pump is small; it is suitable to all kinds of vacuum screwdrivers.
- The suction of vacuum pump is powerful; if the screws tray is using together, it will be more convenient and easy. The screws can be placed at the tray first and then sucked by the vacuum screwdriver.

Specifications

Model		SKD-2000L (VACUUM TYPE)	SKD-2200L (VACUUM TYPE)	SKD-2300L (VACUUM TYPE)
Input Voltage		DC24V or DC32V		
Torque	(kgf.cm)	0.2~3.5	0.5~7	1~10
	(Lbf.in)	0.18~3.01	0.44~6.10	0.89~8.67
	(N.m)	0.02~0.34	0.05~0.69	0.1~0.98
Repeatable Torque Accuracy(%)		±3%		
Torque Adjustment		Stepless		
Free Speed (r.p.m)	HI	1000	1000	700
	LO	700	700	500
Screw Size Dia (mm)	Machine Screw	1.0~2.3	1.4~2.6	1.6~3.0
	Tapping Screw	1.0~2.0	1.4~2.3	1.6~2.6
Power Consumption		25W		
Weight(g)		419		
Length(mm)		265		
ESD(Anti-Static)		✓ (with black housing)		
CE		✓		
RoHS		✓		
Power Controller		SKP-32HL-60W		
Bit Type				

External Dimension

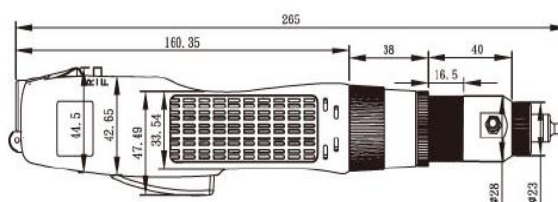

KS-2



Bit nozzle specification

PART NO	d1	d2	D	H	Bit Dia (mm) T x D x L
P11032	2.2	3	4	1.3	00X1.5X60
P11032-1	2.7	4	5	1.5	0X2.0X60
P11032-2	3.2	4.5	5.5	2	1X2.5X60
P11032-3	3.7	5.8	6.8	3	BN200:1X3.0X60 BN500:2X3.0X60

